

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LUXULA

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: LX400151

Type of light source:

| | | | |
|---|----------|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | SMD 2835 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters

| Parameter | Value | Parameter | Value |
|--|---------------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 20 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 900 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 |
| On-mode power (P_{on}), expressed in W | 20,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,50 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimensions without separate control gear, lighting control | Height | 50 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 140 | |
| | Depth | 104 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,380 0,380 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 80 | Survival factor | - |
| the lumen maintenance factor | - | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,90 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,9 |

(a)-: not applicable;

(b)-: not applicable;

Spectrum Test Report

Product Information

Product Type: LX400151
Product Number: 1


Product Spec: 4000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3759$ $y=0.3746$ $u(u')=0.2230$ $v=0.3333$ $v'=0.5000$
CCT: $T_c=4112K$ ($duv=0.00035$) Color Ratio: $R=0.180$ $G=0.785$ $B=0.036$
Peak Wavelength: 0nm Half Bandwidth: 20.2nm
Dominant Wavelength: 579.4nm Color Purity: 0.252

CRI: R_i : $R_a=82.6$

$R_1=81$ $R_2=89$ $R_3=94$ $R_4=82$ $R_5=81$ $R_6=84$ $R_7=86$ $R_8=65$
 $R_9=9$ $R_{10}=72$ $R_{11}=80$ $R_{12}=58$ $R_{13}=83$ $R_{14}=96$ $R_{15}=76$

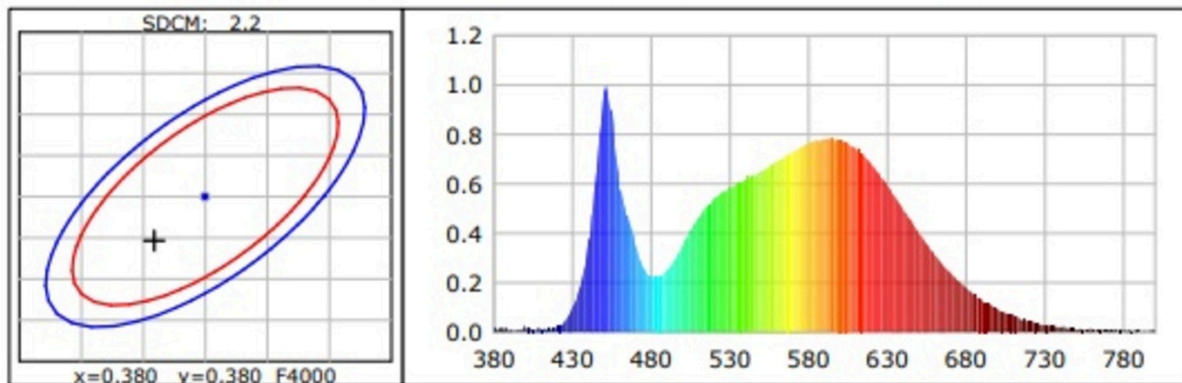

Photometric Parameters

Luminous Flux: 1884.4 lm

Efficiency: 91.92 lm/W

Radiant Power: 5.691 W

Electric Parameters

Voltage: 229.90V

Current: 0.0970A

Power: 20.500W

Power Factor: 0.920


Frequency: 50.00Hz

Test Information

Scan Range: 380nm~800nm:1nm
Stabilization Time: 0 Min
Max of Signal: 11431 (37560)

Photometric Method:
Photometric Condition: Sphere diameter: 1.00m, 4T
CCD Integration Time: 472.69 ms

Model placed on the Union market from 01/03/2024



EPREL registration number: 1863921

<https://eprel.ec.europa.eu/qr/1863921>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213

26441 Jever

Germany