

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LUXULA

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: LX300117

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 565 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	240	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	240	
	Depth	32	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
Parameters for LED and OLED light sources:			
R9 colour rendering index value	24	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)-: not applicable;

(b)-: not applicable;

Spectrum Test Report

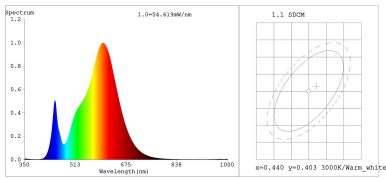

Color Parameters:
 Chromaticity Coordinates: x=0.4422 y=0.4044 u'=0.2539 v'=0.5223
 CCT=2915K (Duv=-0.0006) Dominant Wl:ld =583.4nm Purity=54.1%
 Ratio:R=23.030% G=74.793% B=2.176% Peak Wl:lp=599.7nm FWHM=117.3nm
 Render Index:Ra=79.7 AvgR=73.8 TM30:Rf=79 Rg=96
 R1 =77 R2 =88 R3 =96 R4 =78 R5 =78 R6 =86 R7 =81
 R8 =53 R9 =0 R10=74 R11=77 R12=70 R13=80 R14=98 R15=69


Photo Parameters:
 Flux = 2589 lm Eff. : 113.43 lm/W Pe = 7.757 W

Electrical parameters:
 V = 229.88 V I = 0.1111 A P = 22.83 W PF = 0.8940
 LEVEL:OUT WHITE:ANSI_3000K

Status: Integral T = 12 ms Ip = 50442 (774)

Number:stable 3000K LED
 Module
 Date:2023-03-07 16:57:23
 Temperature:Deg
 Humidity:65.0%
 Manufacturer:
 Remarks:

Spectrum Test Report

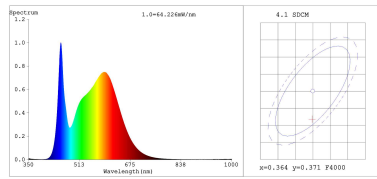

Color Parameters:
 Chromaticity Coordinates: x=0.3640 y=0.3625 u'=0.2198 v'=0.4927
 CCT=4390K (Duv=0.0016) Dominant Wl:ld =578.7nm Purity=18.0%
 Ratio:R=17.466% G=78.211% B=4.323% Peak Wl:lp=453.3nm FWHM=23.2nm
 Render Index:Ra=84.2 AvgR=78.0 TM30:Rf=82 Rg=95
 R1 =83 R2 =92 R3 =95 R4 =82 R5 =83 R6 =87 R7 =86
 R8 =66 R9 =11 R10=79 R11=82 R12=62 R13=86 R14=98 R15=78


Photo Parameters:
 Flux = 2810 lm Eff. : 130.27 lm/W Pe = 8.722 W

Electrical parameters:
 V = 229.86 V I = 0.1054 A P = 21.57 W PF = 0.8901
 LEVEL:OUT WHITE:ANSI_4500K

Status: Integral T = 12 ms Ip = 46969 (728)

Number:stable 4000K LED
 Module
 Date:2023-03-07 16:57:57
 Temperature:Deg
 Humidity:65.0%
 Manufacturer:
 Remarks:

Spectrum Test Report

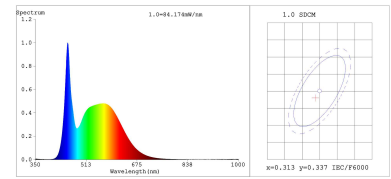

Color Parameters:
 Chromaticity Coordinates: x=0.3118 y=0.3350 u'=0.1950 v'=0.4713
 CCT=6506K (Duv=0.0067) Dominant Wl:ld =492.7nm Purity=7.2%
 Ratio:R=12.893% G=81.217% B=5.890% Peak Wl:lp=453.3nm FWHM=23.5nm
 Render Index:Ra=81.8 AvgR=74.2 TM30:Rf=80 Rg=92
 R1 =79 R2 =88 R3 =93 R4 =79 R5 =80 R6 =83 R7 =87
 R8 =65 R9 =0 R10=72 R11=78 R12=57 R13=82 R14=97 R15=73


Photo Parameters:
 Flux = 2619 lm Eff. : 116.92 lm/W Pe = 8.351 W

Electrical parameters:
 V = 229.90 V I = 0.1092 A P = 22.40 W PF = 0.8923
 LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 9 ms Ip = 46236 (718)

Number:stable 6000K LED
 Module
 Date:2023-03-07 16:58:26
 Temperature:Deg
 Humidity:65.0%
 Manufacturer:
 Remarks:

Model placed on the Union market from 24/03/2023



EPREL registration number: 1535578

<https://eprel.ec.europa.eu/qr/1535578>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213
26441 Jever
Germany