

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LUXULA

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: LX400122

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD 2835		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	30,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	143	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	180	
	Depth	55	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
Parameters for LED and OLED light sources:			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report


Product Information

Product Category: LED FLOOD LIGHT
Product Spec: 3000K

Product Type: LX400122
Product Number: 3

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4394$ $y=0.4026$ $u(u')=0.2528$ $v=0.3475$ $v'=0.5212$
CCT: $T_c=2946K$ ($duv=-0.00092$) Color Ratio: $R=0.216$ $G=0.770$ $B=0.014$
Peak Wavelength: 595.2nm Half Bandwidth: 114.0nm
Dominant Wavelength: 583.4nm Color Purity: 0.527
CRI: $R_a=70.9$ TM30: $R_f=69$, $R_g=96$
 $R_1=67$ $R_2=80$ $R_3=92$ $R_4=68$ $R_5=67$ $R_6=73$ $R_7=76$ $R_8=43$
 $R_9=-34$ $R_{10}=55$ $R_{11}=63$ $R_{12}=47$ $R_{13}=70$ $R_{14}=95$ $R_{15}=60$
Color Quality Scale: $Q_a=70.7$, $Q_f=71.1$, $Q_p=74.3$, $Q_g=90.1$
 $Q_1=66$ $Q_2=96$ $Q_3=69$ $Q_4=65$ $Q_5=69$ $Q_6=68$ $Q_7=68$ $Q_8=76$
 $Q_9=95$ $Q_{10}=79$ $Q_{11}=74$ $Q_{12}=72$ $Q_{13}=72$ $Q_{14}=59$ $Q_{15}=61$

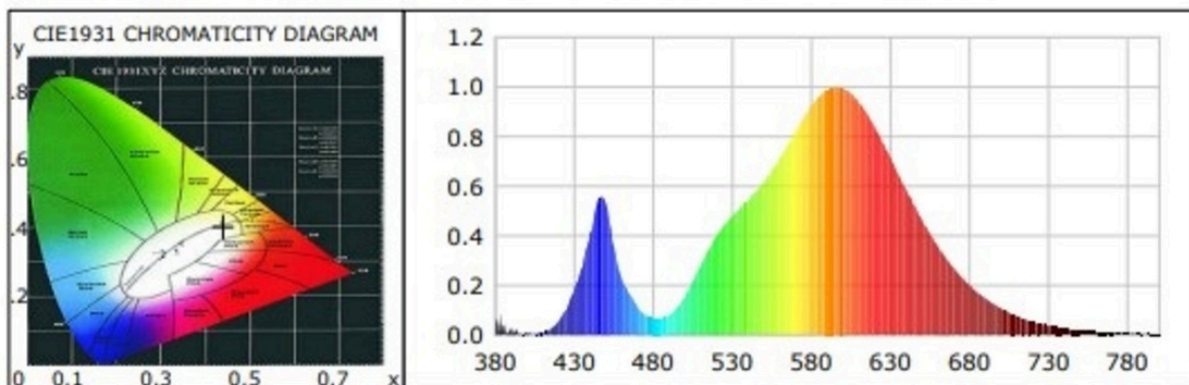

Photometric Parameters

Luminous Flux: 2697.58 lm
EEI: 0.15

Efficiency: 88.16 lm/W
Energy Efficiency Class: A+ (EU 874-2012)

Radiant Power: 7.680 W

Electric Parameters

Voltage: 231.50V
Power Factor: 0.9790

Current: 0.1350A
Frequency: 50.00Hz

Power: 30.60W

Test Information


Scan Range: 380~800:1nm
Stabilization Time: 0 ms
Max of Signal: 11987 (37311)

Photometric Method: sphere-spectroradiometer
Photometric Condition: Sphere diameter: 1.00m, 4T
CCD Integration Time: 79.48 ms

Condition: $T_x:0.0^{\circ}C$, $T_i:0.0^{\circ}C$, R.H.:60%
Test Lab:
Operator:

Test Device: Inventfine CMS-2S (Plus)
Test Time:
Inspector:

Model placed on the Union market from 03/04/2023



EPREL registration number: 1545918

<https://eprel.ec.europa.eu/qr/1545918>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213

26441 Jever

Germany