

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LUXULA

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: LX200122

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	32	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 616 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	32,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	43	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	1 115	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,382 0,380
Parameters for LED and OLED light sources:			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;


Spectrum Test Report

Sample :
Specification : LX200122
Sample No. : D06-01
Manufacturer : ENOVATEK GMBH
Assessor : damin
Remark :
Device SN :
Date : 2023-04-01 18:08:15
Sam. Status : 4000K
Standard :
Instrument : HaasSuite(EVERFINE)
Test by : 011

Test Condition

Temperature : 28.1 °C
WL Range : 380nm-780nm
Test Mode : Fast Test High
RH : 65.0%
IP : 48524 (74%)
T : 67 ms

Spectrum

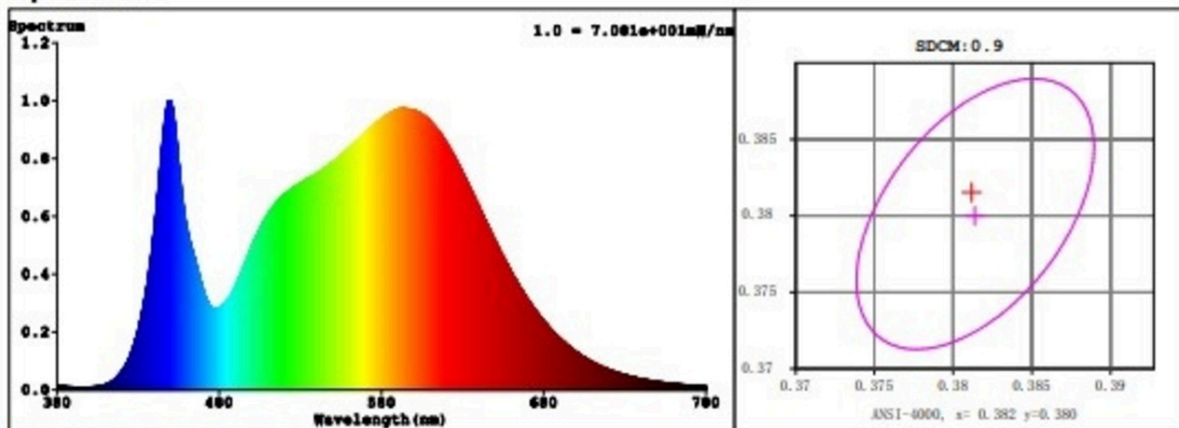

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3816$ $y = 0.3813$ / $u' = 0.2241$ $v' = 0.5037$ ($duv=1.77e-03$) $Dx, Dy: 0.0012, 0.0046$
CCT= 4002K Prcp WL: $L_d=578.1\text{nm}$ Purity=28.9%
Peak WL: $L_p=450\text{nm}$ FWHM: =23.7nm Ratio:R=18.3% G=78.2% B=3.5%
Render Index: $R_a = 83.8$ AvgR = 77.3

R1 =82 R2 =89 R3 =95 R4 =84 R5 =82 R6 =85 R7 =87
R8 =66 R9 =12 R10=74 R11=83 R12=65 R13=83 R14=97 R15=76
LEVEL:OUT WHITE:ANSI_4000K


Photometric & Radiometric Parameters

Flux = 4022.8 lm Eff. : 112.02 lm/W $F_e = 12.248$ W
EEI: 0.12160 A+
EEC: 112.0 E

Electrical parameters

V = 229.74 V I = 0.1595 A P = 35.91 W PF = 0.9802 F=50.00 Hz
Kdisp = 0.9838

Model placed on the Union market from 16/02/2023



EPREL registration number: 1480877

<https://eprel.ec.europa.eu/qr/1480877>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213
26441 Jever
Germany